




- 1 CAM 1
- 1 CAM 2
- 1 CAM 3
- 1 CAM 4

Once have entered username and password you will see this screen.

To open the live stream of cameras click on "Open All"

Once done this the cameras will appear in boxes dependant on how many have connected to CCTV system

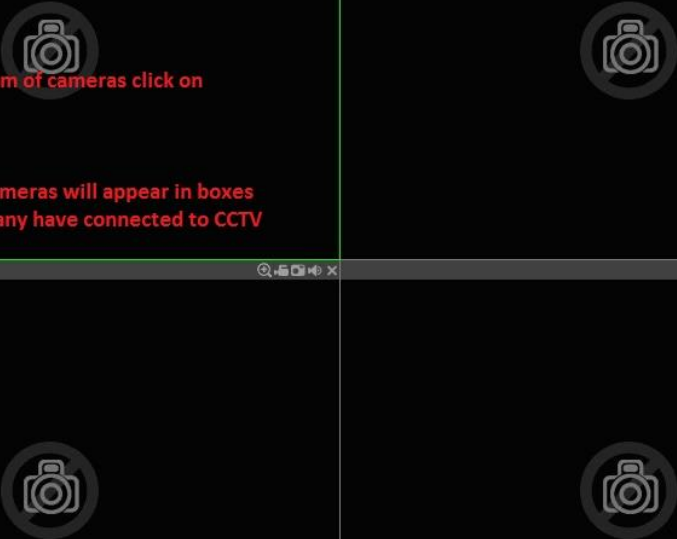

- Open All
- Start Talk
- Instant Record
- Local Play

Speed(1-8): 5

Zoom

Focus

Iris

Image Setup Relay-out

Reset



PLAYBACK

PLAYBACK
http://192.168.1.108/

Live Playback Alarm Setup Info Logout

To go into playback click on the tab above "Playback" and this screen will appear.

The calendar on the right shows the recorded days, if click on one of the dates the 24 hr segments shown in green at the bottom of screen will show, if there motion only recording they will be in orange.

To now start playback click on a time section below e.g 8am, this will start playback of if chosen just one camera or all of them.

Please be aware if accessing over internet dependant on internet line speed it may be best to opt for single view

Rewind / Play / Stop / Playback speed

If wish to now download CCTV footage to your device click here after stopping playback and go to next instruction page

File List

00:00:00 ~ 23:59:59

Stop

All Regular MD Alarm Card

The screenshot shows the Dahua Playback interface. At the top, there are navigation tabs: Live, Playback, Alarm, Setup, Info, and Logout. The 'Playback' tab is selected. Below the tabs, there are four camera viewports. The top-left viewport contains red text instructions. The top-right viewport shows a calendar for January 2018, with a red arrow pointing to the 17th. The bottom-left viewport contains red text instructions. The bottom-right viewport contains red text instructions and a 'File List' button. At the bottom, there is a playback control bar with buttons for Rewind, Play, Stop, and Playback speed (set to 1X). Below the control bar is a timeline with 24 segments, each with a green bar indicating recorded footage. At the very bottom, there is a 'Stop' button and a legend for recording types: All, Regular (green), MD (yellow), Alarm (red), and Card (blue).



00 : 00 : 00

1	2	3	4
Start Time	Type		
<input type="checkbox"/>	00:00:00	R	
<input type="checkbox"/>	01:00:00	R	
<input type="checkbox"/>	02:00:00	R	
<input type="checkbox"/>	03:00:00	R	
<input type="checkbox"/>	04:00:00	R	
<input type="checkbox"/>	05:00:00	R	
<input type="checkbox"/>	06:00:00	R	
<input type="checkbox"/>	07:00:00	R	
<input type="checkbox"/>	08:00:00	R	
<input type="checkbox"/>	09:00:00	R	
<input type="checkbox"/>	10:00:00	R	
<input type="checkbox"/>	11:00:00	R	
<input type="checkbox"/>	12:00:00	R	
<input type="checkbox"/>	13:00:00	R	
<input type="checkbox"/>	14:00:00	R	

Click on here and go to next instruction page

1/2 Jump To 1

Start Time:
End Time:
File Size:

More Download Back


Playback controls: Stop, Play, Pause, Previous, Next, 1X speed, Volume, Mute

12:00:00 ~ 13:59:59



Stop

- All
- Regular ■
- MD ■
- Alarm ■
- Card ■

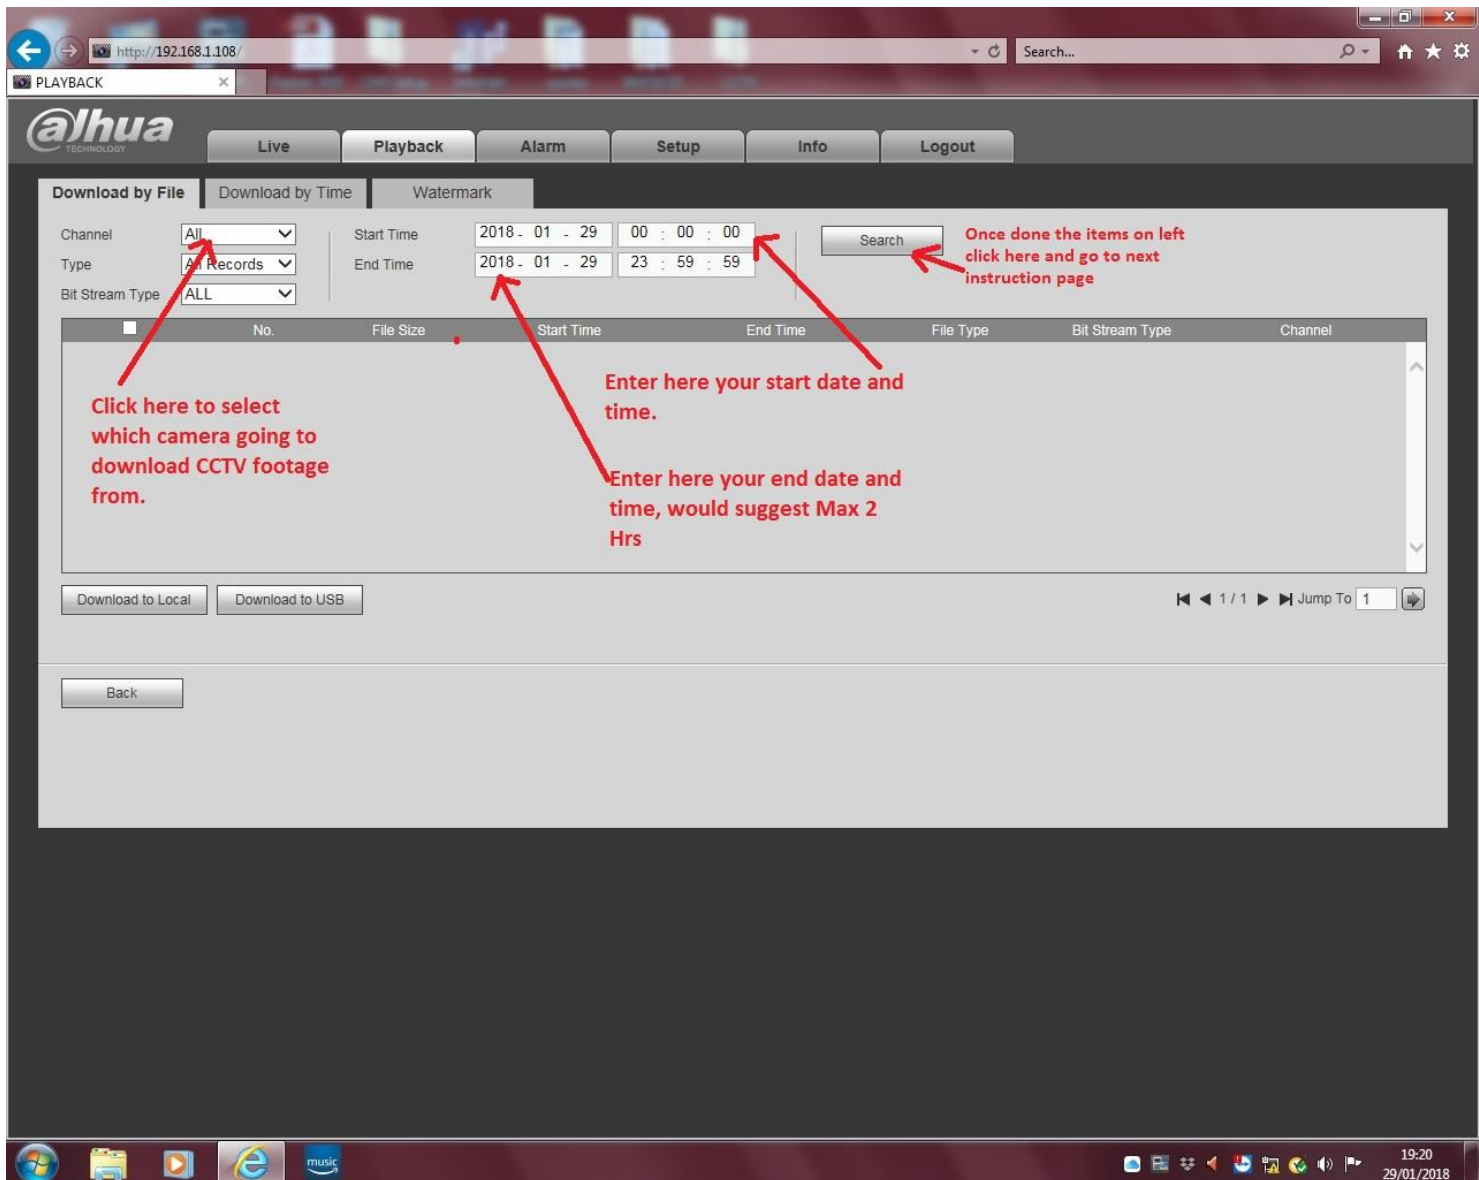

Click here to select which camera going to download CCTV footage from.

Enter here your start date and time.

Enter here your end date and time, would suggest Max 2 Hrs

Once done the items on left click here and go to next instruction page

Download by File | Download by Time | Watermark

Channel: All
 Type: All Records
 Bit Stream Type: ALL

Start Time: 2018 - 01 - 29 00 : 00 : 00
 End Time: 2018 - 01 - 29 23 : 59 : 59

Search

No.	File Size	Start Time	End Time	File Type	Bit Stream Type	Channel

Download to Local | Download to USB

1 / 1 | Jump To 1

Back



Download by File Download by Time Watermark

Channel: 1 Start Time: 2018 - 01 - 10 10 : 00 : 00
Type: All Records End Time: 2018 - 01 - 10 10 : 59 : 59
Bit Stream Type: ALL

Search

<input checked="" type="checkbox"/>	No.	File Size	Start Time	End Time	File Type	Bit Stream Type	Channel
<input checked="" type="checkbox"/>	1	1395707KB	2018-01-10 09:00:00	2018-01-10 10:00:00	Regular	Main Stream	1
<input checked="" type="checkbox"/>	2	1321148KB	2018-01-10 10:00:00	2018-01-10 11:00:00	Regular	Main Stream	1
<input checked="" type="checkbox"/>	3	227293KB	2018-01-10 10:00:00	2018-01-10 11:00:00	Regular	Sub Stream	1

This page will now appear, now tick the box so all are ticked and go to next instruction page

Download to Local Download to USB

1 / 1 Jump To 1

Back



Download by File Download by Time Watermark

Channel: 1 Start Time: 2018-01-10 10:00:00 Search

Type: All Records End Time: 2018-01-10 10:59:59

Bit Stream Type: ALL

<input checked="" type="checkbox"/>	No.	File Size	Start Time	End Time	File Type	Bit Stream Type	Channel
<input checked="" type="checkbox"/>	1	1395707KB	2018-01-10 09:00:00	2018-01-10 10:00:00	Regular	Main Stream	1
<input checked="" type="checkbox"/>	2	1321148KB	2018-01-10 10:00:00	2018-01-10 11:00:00	Regular	Main Stream	1
<input checked="" type="checkbox"/>	3	227293KB	2018-01-10 10:00:00	2018-01-10 11:00:00	Regular	Sub Stream	1

Record Format: DAV

Save Path: C:\RecordDownload\ Browse

OK Cancel

Download to Local Download to USB

Back

Browse for Folder

- Desktop
- Network
- Libraries
- Homegroup
- Computer
 - System (C:)
 - DVD RW Drive (D:)
 - Office 2013 Tools
 - CCTV
 - Insurances

OK Cancel

Click on here and the box will appear shown in middle of screen

Once this box is on the screen click on browse.

The box here will appear.

Select a folder on your PC to save images to.

Once done this click on OK and this box will disappear.

Now click OK on the box in middle of screen and download will begin

Once download complete you can close down by clicking on "x" in top right of your screen